APPLICATION NOTE

ESD protection for CAN bus

© Diotec Semiconductor AG | V03

1. Introduction

The ever-increasing demand for ESD protection in today's fast-growing mobile device market has led Diotec to focus on providing circuit protection solutions.

Whether the end application is portable electronics, a USB device or a CAN bus in the automotive industry, Diotec's portfolio of overvoltage protection products provides a solution for all applications.

2. Evolution of the vehicle network

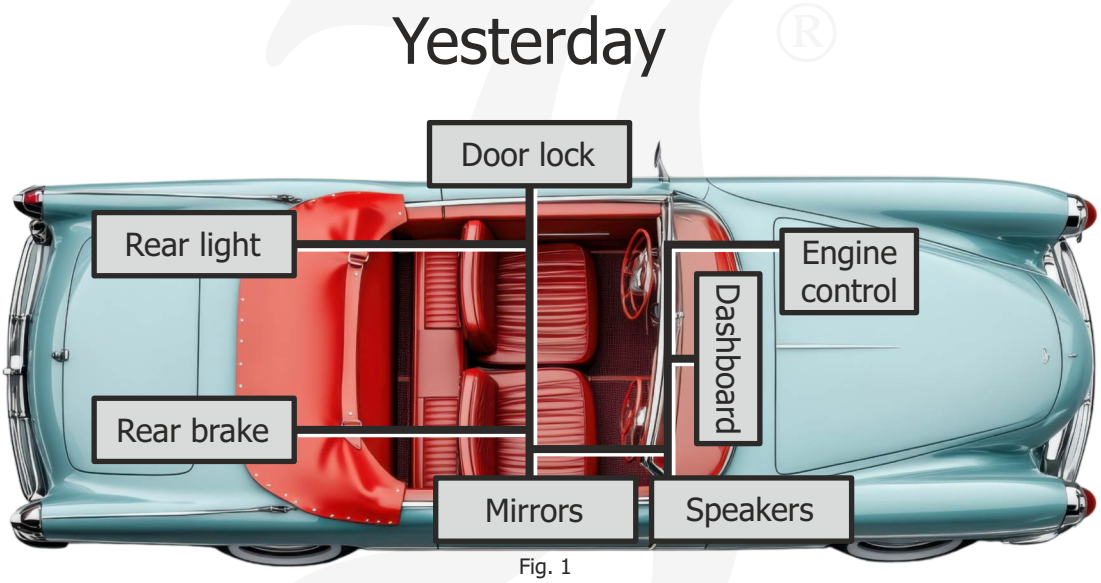

Fig. 1

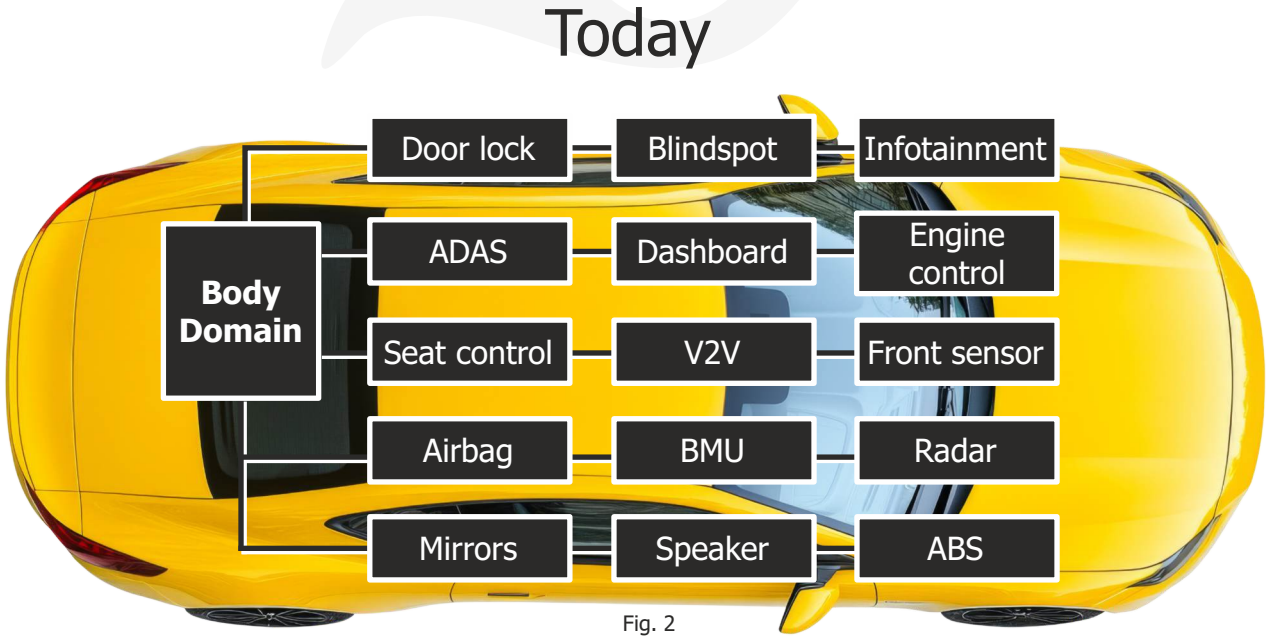

Fig. 2

3. In-vehicle network

In-vehicle networking technologies are essential for enabling faster, safer and more secure communication - both for today's vehicles and the connected, autonomous vehicles of the future. Common in-vehicle network protocols include LIN, CAN and FlexRay, alongside high-speed Ethernet standards such as 100BASE-T1 and 1000BASE-T2.

As vehicles become more complex, with higher computational power, IC miniaturization and varying power requirements in increasingly compact spaces, electronic components and systems are becoming more susceptible to electrostatic discharge (ESD).
As illustrated here, ESD immunity tends to decrease with increasing data transmission speeds. Higher

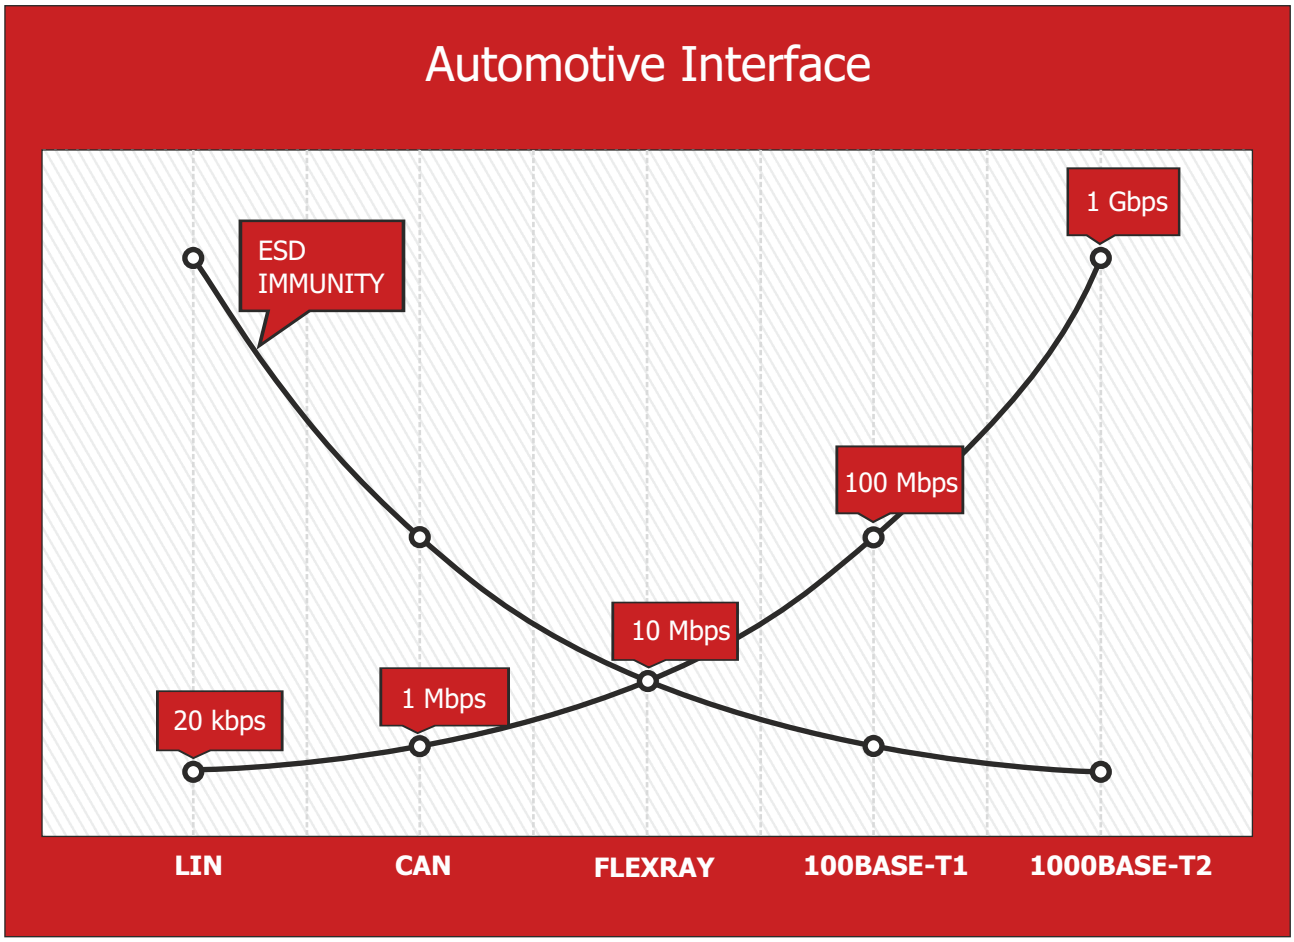

Fig. 3

transmission rates are associated with lower line capacitance, which implies smaller semiconductor structures - making them more vulnerable to ESD, as even lower voltages can damage thinner gate oxides.
The good news is that ESD or Electrical Overstress (EOS) damage can be significantly reduced - or even fully prevented - through a well-designed ESD protection strategy.

Diotec's expertise in ESD protection helps engineers minimize the risk of ESD-related failures, supporting the development of robust and reliable automotive applications. Among the various communication protocols, the Controller Area Network (CAN) stands out as one of the most widely used in modern vehicles. Given its ubiquity in new vehicle platforms, ESD protection for the CAN bus has become a critical focus in ensuring long-term system reliability.

The CAN bus has become the standard communication protocol in modern vehicles due to its robustness, reliability and cost-effectiveness. CAN was designed to handle the increasing complexity of automotive electronics while reducing wiring. It enables real-time communication between various electronic control units (ECUs) using a simple two-wire system, significantly lowering system complexity and weight. Its built-in error detection, fault tolerance and ability to operate in electrically noisy environments make it ideal for automotive applications. As a result, CAN is now widely adopted across virtually all vehicle platforms, managing everything from powertrain control and braking systems to lighting, climate control and infotainment.

4. CAN bus overview

So, what exactly is CAN? The Controller Area Network (CAN) is a differential two-wire communication standard - using CAN_H and CAN_L. It allows various electronic control units (ECUs) and modules within a vehicle to communicate over a shared communication bus. This enables data and commands to travel efficiently between systems, allowing seamless coordination across numerous functions.

CAN manages communication between systems such as the Powertrain Control Module (PCM), anti-lock braking, traction and stability control, electronic steering, suspension systems, automatic climate control, keyless entry, lighting modules and many others.

CAN systems began appearing in production vehicles around 2003. By 2008, virtually all passenger cars and light trucks sold in the U.S. were equipped with CAN-based networks. Originally developed in 1984 by Robert Bosch GmbH, the CAN protocol was designed to meet the growing need for robust, reliable communication between increasingly sophisticated onboard electronic systems.

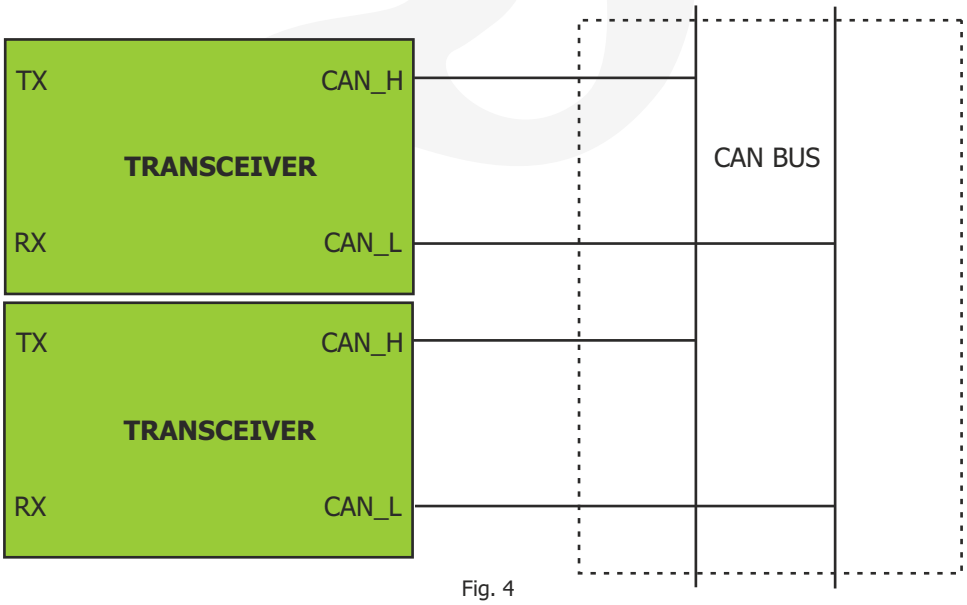

Fig. 4

5. Why does a CAN bus need protection?

- Noisy, harsh environment operation
- Nodes must sustain high energy transients
  - Load dump
  - Inductive switching
  - Relay noise
  - Ignition system noise
- Automotive systems require a high level of robustness and must be extremely reliable, especially when they control safety devices.

Parameter	High Speed CAN	Low Speed CAN
Physical layer	ISO 11898-2	ISO 11898-3
Speed	1 Mbit/s @ 40 m 5 Mbit/s (CAN FD)	125 kbit/s @ 500 m
Min/Max supply voltage	12 V System: -3/16 V 24 V System: -3/32 V	
Min/Max common mode voltage	CAN_L: -2 - 2.5 V CAN_H: 2.5 V - 7 V	
Termination Resistance	120 Ω resistors at each node	2.2 kΩ serial on each side
Signal Waveform	 **High Speed CAN (ISO11898-2)** **Bus Logic States** Recessive: ΔV ≤ 0.5 V Dominant: ΔV ≥ 0.9 V	 **Fault Tolerant CAN (ISO11898-3)** **Bus Logic States** Recessive: CAN_H > 0.5 V Dominant: CAN_H < 0.9 V

6. CAN ESD compliant standards:

Standards	Hazards	Description	CAN protection specifics
ISO 10605	ESD protection	Simulation of voltage spikes due to electro-static discharge, based on IEC61000-4-2	ESD robustness up to 15 kV contact (R=330 Ω, C= 330 pF) and low ESD clamping voltage
ISO 7637-3, pulse 3a/3b	Surge protection	Fast transient test pulses are generated when relays open or close on the battery bus, and these pulses can couple onto the data line	Must pass the surge and clamp the generated overvoltage. 12 V system = -110 V – 75 V 24 V system = -150 V – 150 V Repetitive pulses with a short duration of 150 ns and a very fast rise time of 5 ns for 10 mins.
ISO16750-2	Jump start	Wrong connection of battery in series with a flat battery, in this case, 24 V is applied on the entire system for 1 min without failure	Reverse breakdown voltage V_{BR} > 24 V
ISO16750	Reverse battery	Application of -14 V for 12 V battery system and -28 V for 24 V battery over 60 s to simulate reversed battery connection when using an auxiliary starting device	Forward breakdown voltage V_{BR} < -14 V for 12 V battery Forward breakdown voltage V_{BR} < -28 V for 24 V battery
ISO16750-2	Short to battery	This test simulates a failure on the regulator device, leading to an overvoltage to the battery power line.	Applicable voltage = 18 V (12 V System) Applicable voltage = 36 V (24 V System)

7. ESD protection device selection:

1. Maximum supply voltage

   A ESD diode is designed to clamp transient voltages, but it is not intended to operate in avalanche mode under continuous DC conditions. Therefore, when the CAN bus is exposed to sustained overvoltage events - such as a short to battery, jump start, or reverse battery connection - where the current is not limited and the test duration can last from one minute to an hour, the EDS diode must avoid entering avalanche mode. Based on these requirements, a breakdown voltage greater than 24 V is recommended for 12 V systems, and 36 V for 24 V systems.

2. Common mode voltage

   Common mode voltage arises when there is a significant voltage potential difference between the ground references of the transmitting and receiving nodes. According to ISO 11898, the voltage on the data lines may shift by up to ±2.0 V from their nominal levels. Therefore, the maximum working voltage of the EDS diode must accommodate this potential offset.

3. Maximum transmission speed

   The transmission speed of CAN data signals imposes a limit on the maximum allowable capacitance of the data lines. Minor signal distortion is acceptable as long as the capacitance on the CAN_H and CAN_L lines is well balanced. However, due to inherent tolerances, it is difficult to precisely match the discrete capacitance of an ESD diode. Therefore, the capacitance introduced by the ESD diode should be kept as low as possible.

4. ESD rating

   An ESD event can occur when a charged object - such as a person - touches or approaches the connector pins or cable. To ensure robust protection, it is recommended that the CAN bus supports a contact discharge rating of at least ±15 kV, as outlined by IEC61000-4-2, IEC61000-4-5.

8. ESD testing standard IEC61000-4-2

Indicated voltage	I_{peak} (±15%) A	t_r (±25%) A	I @ 30 ns (±30%) A	I @ 60 ns (±30%) A
2 kV	7.5	0.8	4.0	2.0
4 kV	15.0	0.8	8.0	4.0
6 kV	22.5	0.8	12.0	6.0
8 kV	30.0	0.8	16.0	8.0

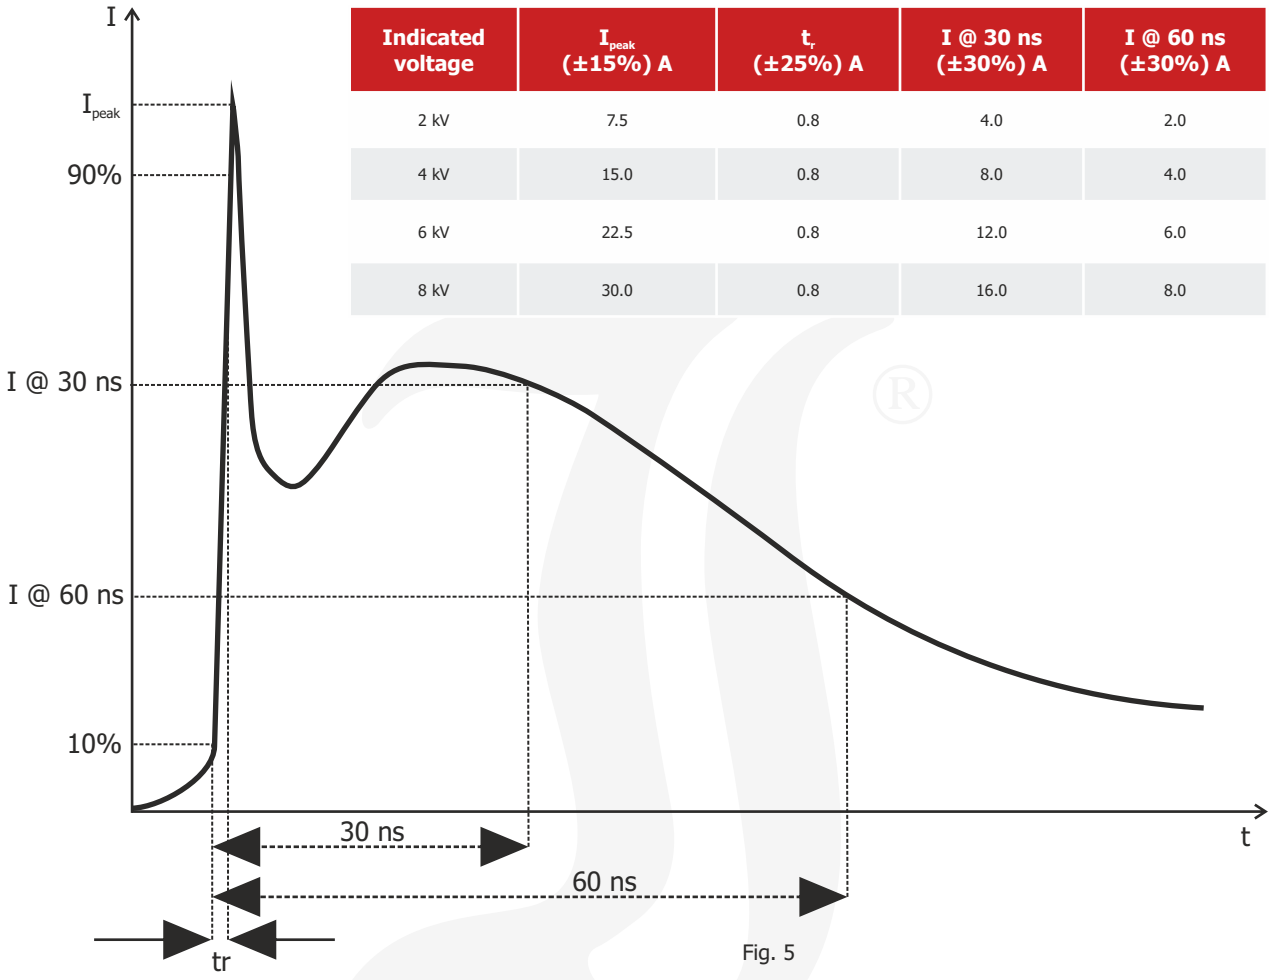

Fig. 5

- IEC 61000-4-2 defines test methods and configuration environment for ESD robustness testing
- The pulse rises within 0.7 to 1 ns
- The first spike reaches its peak current with the peak value I_{peak}
- The pulse then declines within about 80 ns including a shoulder-shape curve
- Most of the surge pulse energy is carried by the shoulder
- The first spike stresses the target with voltage and high current, but with less energy because the duration is short.

9. ESD testing standard IEC61000-4-5

9.1. Waveform of open-circuit voltage (1.2/50 µs) at the output of the generator with no CDN connected (waveform definition according to IEC 60060-1)

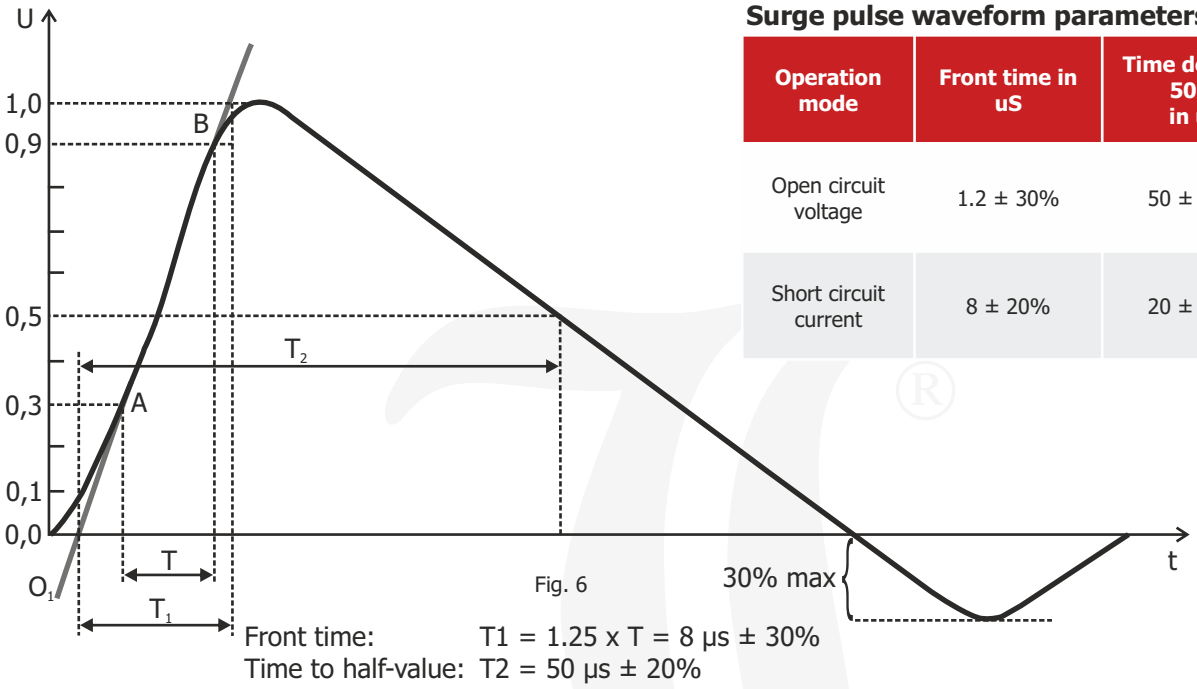

Fig. 6

Front time: T1 = 1.25 x T = 8 µs ± 30%
Time to half-value: T2 = 50 µs ± 20%

Surge pulse waveform parameters

Operation mode	Front time in uS	Time down to 50% in uS
Open circuit voltage	1.2 ± 30%	50 ± 20%
Short circuit current	8 ± 20%	20 ± 20%

Note: The open circuit voltage waveform at the output of the coupling/decoupling network may have a considerable undershoot, Fig. 6

9.2. Waveform of short-circuit current (8/20 µs) at the output of the generator with no CDN connected (waveform definition according to IEC 60060-1)

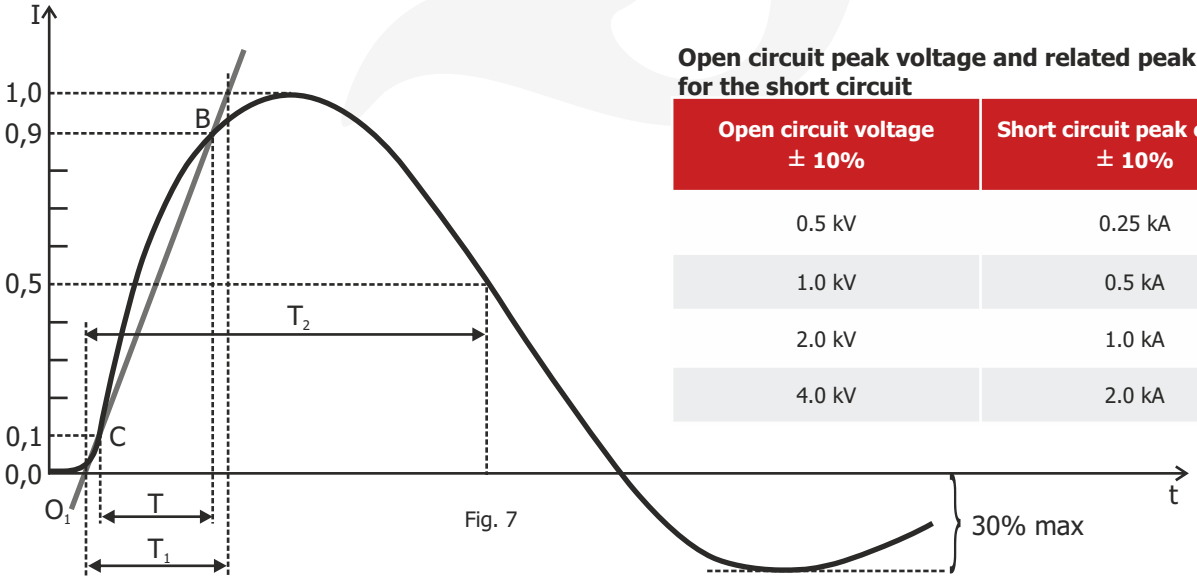

Fig. 7

Front time: T1 = 1.25 x T = 8 µs ± 20%
Time to half-value: T2 = 20 µs ± 20%

Open circuit peak voltage and related peak current for the short circuit

Open circuit voltage ± 10%	Short circuit peak current ± 10%
0.5 kV	0.25 kA
1.0 kV	0.5 kA
2.0 kV	1.0 kA
4.0 kV	2.0 kA

Note: The open circuit voltage waveform at the output of the coupling/decoupling network may have a considerable undershoot, Fig. 7

10. Common protection methods

The NUP2105L-AQ ESD diode is designed to protect high speed communication lines from ESD events. Ultra−low capacitance and high level of ESD protection make these devices well suited for use in CAN applications.

Features

- Dual bi-directional ESD diode in SOT-23
- Breakdown voltage > 24 V
- Low capacitance < 30 µF
- Low leakage current
- IEC61000-4-2 ± 30 kV
- Qualified to AEC-Q101 for high reliability

Typical applications

- High speed data line and power line protection
- Can bus protection
- Monitors and flat panel displays
- Notebook computers



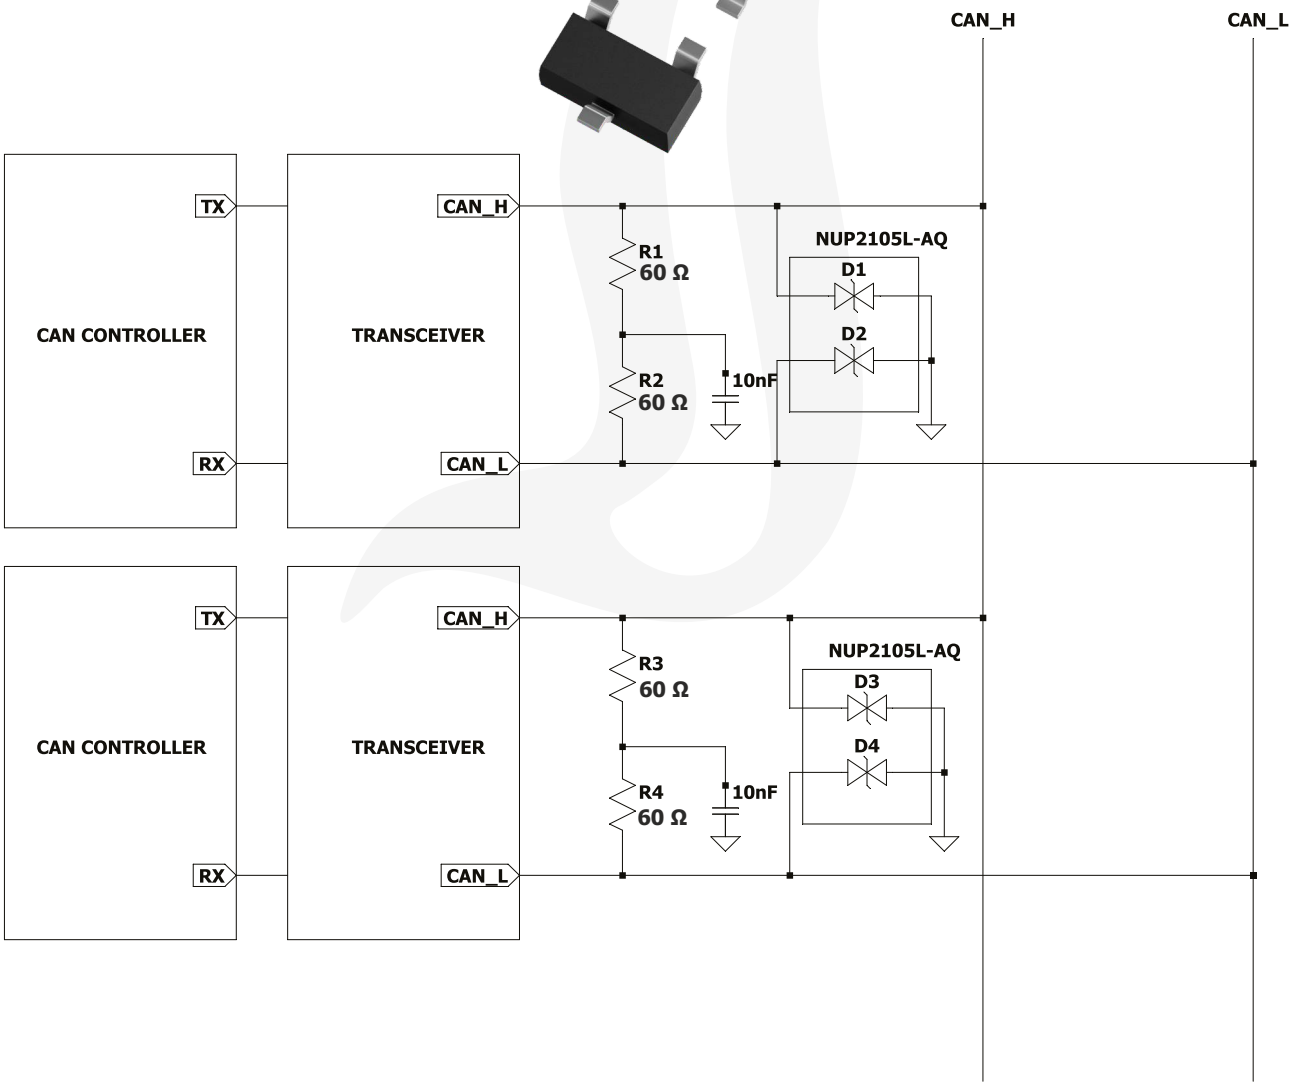

11. Reliable CAN bus protection with Diotec's NUP2105L-AQ

Automotive networks demand a higher standard of ESD protection than typical consumer electronics. Diotec's **NUP2105L-AQ** is purpose-built for the CAN bus, offering robust protection for transceiver lines against ESD events — without compromising signal integrity.

Designed for harsh automotive environments, this diode withstands short-to-battery conditions and maintains stable performance during EMI testing. With optimized capacitance values, the NUP2105L-AQ ensures minimal signal distortion, making it ideal for differential communication systems like CAN. Its precise capacitance matching helps prevent unwanted signal skew and jitter, ensuring smooth and reliable data transmission across the vehicle network.

Choose Diotec's NUP2105L-AQ for your next automotive design — where safety, signal integrity and performance matter most.

12. Common automotive communication bus protection

Type	Description		Circuit	Applications
NUP2105L-AQ NUP2405L-AQ	24 V 240 W - 350 W SOT-23			Automotive CAN
ESD3B24WS-AQ	24 V 350 W SOD-323			Low speed CAN CAN/Switches Buttons/IO ports
ESDB24C-AQ	24 V 200 W SOT-23			Automotive CAN
ESDB24D-AQ	24 V 67 W DFN0603			Automotive LIN Bus

13. PCB layout recommandations for ESD protection devices

- Place ESD diodes close to the connector

  As ESD events typically enter through connectors, mount the ESD diode as close as physically possible to the CAN connector (e.g., DB9, M12). This prevents the ESD pulse from reaching sensitive transceiver inputs.

- Use short and wide traces

  Keep traces between the ESD diode, CAN bus and ground as short and wide as possible to minimize parasitic inductance and resistance to ensure fast clamping.

- Ground path is key

  Ensure the ESD diode has a low-inductance path to ground, use a dedicated via to the ground plane preferably one via per ESD diode pad and avoid routing ground traces with loops or unnecessary bends.

- Symmetric placement for differential lines

  For CAN_H and CAN_L, use matched trace length and place symmetrical protection to maintain signal balance, if using a dual-channel diode, center it between the lines.

All rights reserved

The information presented in our data sheets and other documents is to the best of our knowledge true and accurate. It describes the type of component or application and shall not be considered as assured characteristics. No warranty or guarantee, expressed or implied is made regarding the capacity, delivery, performance or suitability of any product or circuit etc, neither does it convey any license under the patent rights of others.
Diotec reserves the right to make changes without further notice. However, regular updating of all product information is provided on our website [1]). All Diotec products are sold and shipped subject to our "Standard Terms and Conditions of Business" [2]). The reproduction of all documents is prohibited without the expressed written permission of Diotec Semiconductor AG's Managing Board.

Alle Rechte vorbehalten

Die Angaben in unseren Datenblättern und sonstigen Dokumenten sind nach bestem Wissen und Gewissen gemacht. Sie dienen jedoch allein der Beschreibung und sind nicht als zugesagte Eigenschaften im Rechts-Sinne zu verstehen. Es wird keine Gewähr bezüglich Liefermöglichkeit, Ausführung oder Einsatzmöglichkeit der Bauelemente übernommen, noch dass die angegebenen Bauelemente, Baugruppen, Schaltungen etc. frei von Schutzrechten sind.
Wir behalten uns Änderungen der aufgeführten Daten ohne vorherige Ankündigung vor. Alle Änderungen werden jedoch regelmäßig auf unserer Internet-Seite veröffentlicht [1]). Verkauf und Lieferung von Diotec-Produkten erfolgt gemäß unseren "Allgemeinen Geschäftsbedingungen" [2]). Die Vervielfältigung aller Dokumente ist nur mit schriftlicher Genehmigung des Vorstandes der Diotec Semiconductor AG gestattet.

Disclaimer

1. All products described or contained are designed and intended for use in standard applications, so called commercial/ industrial grade, requiring an ordinary level of reliability.

2. Some products are available with the special grades "AEC-Q101 compliant" respectively "AEC-Q101 qualified". These are automotive standards [3]).

3. Customers using these parts in applications requiring a special or specific grade of quality or reliability, such as (but not limited to) life supporting devices or systems, where failure or malfunction of the product may directly affect human life or health, are obliged to validate whether the use in such cases is appropriate.
Diotec does not assume any liability arising out of such applications or uses of its products. Usage in all such cases is on the own and sole risk of the customer.

4. Although Diotec continuously enhances the quality and reliability of its products, customers must incorporate sufficient safety measures in their designs, such as redundancy, fire containment, and anti-failure, so that personal injury, fire or environmental damage can be prevented. Diotec excludes explicitly every implied warranty or liability regarding the fitness of the products to any other than standard applications.

5. All information described or contained herein are subject to change without notice. Please contact Diotec to obtain the latest information before incorporating Diotec products into any design.

6. All information described and contained herein are intended only to enable the buyer to order Diotec's products. The information must not be used for any other purpose.

7. In the event that any product described or contained herein falls under the category of strategic products controlled by the German Federal Office of Economics and Export Control, this product must not be exported without obtaining an export license from the German Federal Ministry for Economic Affairs and Climate Action in accordance with the valid laws.

Haftungsausschluss

1. Alle beschriebenen oder enthaltenen Produkte sind für den Gebrauch in Standardanwendungen mit einem gewöhnlichen Zuverlässigkeitsniveau entworfen und bestimmt, bekannt als kommerziell/industrielle Anwendungen.

2. Einige Produkte sind mit den speziellen Qualifikationen „AEC-Q101 konform" oder „AEC-Q101 qualifiziert" erhältlich. Dies sind Automotive-Standards [3]).

3. Falls diese Produkte in Anwendungen verwendet werden sollen, die einen besonderen Grad der Qualität oder Zuverlässigkeit erfordern, z. B. (aber nicht begrenzt auf) lebenserhaltende Geräte oder Systeme, bei denen durch Ausfall oder eine Störung des Produktes menschliches Leben oder Gesundheit direkt beeinflusst werden kann, ist der Anwender verpflichtet sicherzustellen, dass der beabsichtigte Gebrauch des vorgesehenen Produktes unbedenklich ist.
Diotec übernimmt keine Haftung die sich aus solchen Anwendungen oder der Verwendung der Produkte ergibt. Der Gebrauch für alle solche Anwendungen erfolgt auf eigenes und ausschließliches Risiko des Anwenders.

4. Obwohl Diotec die Qualität und die Zuverlässigkeit seiner Produkte beständig erhöht, müssen Kunden ausreichende Sicherheitsvorkehrungen in ihren Designs vornehmen – wie Redundanz, Feuereindämmung und Ausfallschutz – damit Personenschäden, Feuer oder Umweltschädigung verhindert werden können. Diotec schließt ausdrücklich jede implizierte Garantie oder Verbindlichkeit aus, welche die Eignung der Produkte zu irgendwelchen anderen als Standardanwendungen betrifft.

5. Alle Informationen, die hier beschrieben oder enthalten sind, können jederzeit ohne jede Benachrichtigung geändert werden. Vor Einsatz eines Diotec Produktes in irgendeiner Anwendung sind bei Diotec die neuesten Informationen einzuholen.

6. Alle Informationen, die hier beschrieben oder enthalten sind, sollen dem Kunden nur ermöglichen, Diotec Produkte zu bestellen. Die Informationen dürfen zu keinem anderen Zweck verwendet werden.

7. Sollte ein hier beschriebenes oder enthaltenes Produkt unter Beschränkungen fallen, die durch das deutsche Bundesamt für Wirtschaft und Ausfuhrkontrolle geregelt werden, darf dieses Produkt in Übereinstimmung mit den gültigen Gesetzen nicht ohne Exportgenehmigung vom deutschen Bundesministerium für Wirtschaft und Klimaschutz exportiert werden.

1 Refer to http://diotec.com/ "Products/Product Changes" respectively "News/Datasheets"
Siehe http://diotec.com/ „Produkte/Produktänderungen" bzw. „News/Datenblätter"
2 Refer data book or http://diotec.com/ "Company" – Siehe Datenbuch oder http://diotec.com/ „Unternehmen"
3 Refer to http://diotec.com/ "Products/Information/Qualification/Commercial Grade and AEC-Q101"
Siehe http://diotec.com/ „Produkte/Informationen/Qualifizierung/Standard und AEC-Q101"